



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

SURFACELINK

Surface Mounted Anchor | Product Code: SURFL001



- 🔍 Multi-directional fall protection.
- 🔍 Adjustable design to suit different roof profiles.
- 🔍 Surface mounted anchors must not be used for rope access (abseiling).
- 🔍 Install using 12 x Gesipa Bulbtite Rivets, RV6605-9-6W (Drill Size 7.8-8.2mm, 27.7mm length, 1.0-9.5mm grip range, Aluminium).
- 🔍 316 stainless steel construction.
- 🔍 Single person anchor.
- 🔍 Rated at 15kN.
- 🔍 Complies with AS/NZS 1891.4.

What am I used for?

An anchor point designed for use on metal roof sheet profiles where access to timber is difficult. Adjustable design to suit different roof profiles.



POSITIONING OF SAFETYLINK ANCHOR POINT

(refer to appendix diagram of the Installation Handbook)

The first Anchor Point must be in a position easily and safely reached by a secured ladder or a manhole access point.

LIVE LOAD ON ANCHORS:

The SurfaceLink anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees SurfaceLinks should be used in conjunction with other access methods to ensure no live loading. Note: These anchors are not abseil anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

PRODUCT COMPONENTS	QUANTITY
Eyebolt: 316 Stainless Steel with Locking Hex Nut	1
Washers: 70 OD 316 Stainless Steel	1
Surfacelink Side Plate: 316 Stainless Steel with foam tape	2
Washers: 50 OD 316 Stainless Steel	1
Nut: M16 316 Stainless Steel	1

Version 08.17



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.


PRODUCT SHEET

POSITIONING LAYOUT


This is a guide only

All working at heights safety procedures must be complied with when installing SafetyLink anchor points. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.

**SPACING MUST BE NO GREATER THAN THE RAFTER LENGTH
PLEASE CONTACT YOUR DISTRIBUTOR IF YOU ARE UNSURE**

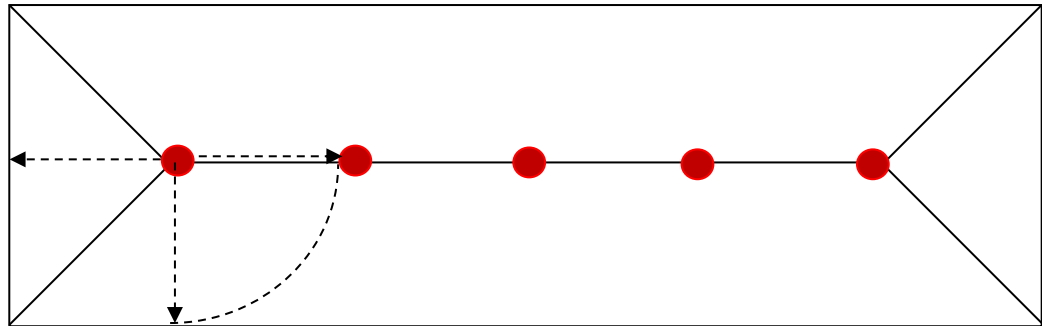

ACCESS, LAYOUT & USE OF A SAFETYLINK ANCHOR SYSTEM
SafetyLink anchor points are positioned by calculating the pendulum effect, this limits the likelihood of a fall past the edge of the roof space.
The pendulum effect still applies to a flat roof.

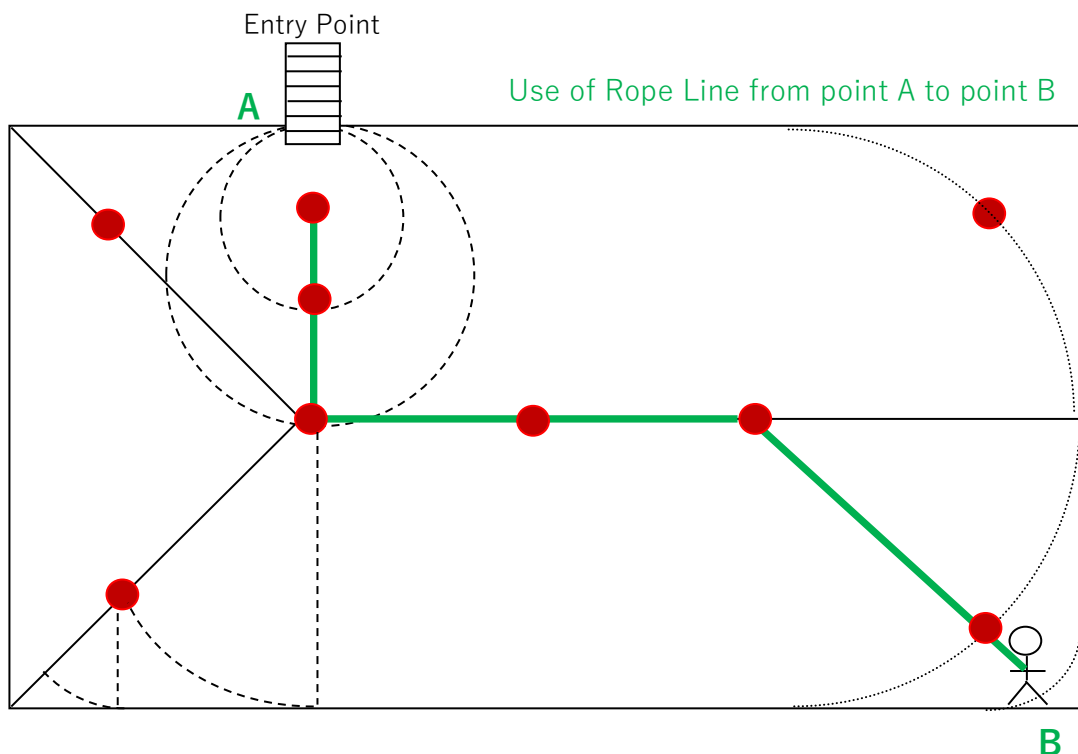

SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARDS TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.

Version 08.17



SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

PRODUCT SHEET

COPYRIGHT TERMS AND CONDITIONS

Copyright in the material contained on this disc/email belongs to SafetyLink Pty Ltd. You are authorised to reproduce this material subject to the following conditions:

1. No changes to the material may be made without SafetyLink Pty Ltd's prior written consent, which consent may be withheld, granted, or granted subject to conditions in SafetyLink Pty Ltd's discretion. Change includes any alteration, addition or deletion to the material or a part of the material that you reproduce.
2. You must ensure that any material you reproduce is marked "Copyright – SafetyLink Pty Ltd 2006".
3. Where you reproduce parts only of the material that must not cause the part reproduced to be misleading in any way or omit any important safety information.
4. You indemnify SafetyLink Pty Ltd against any claim arising out of your reproduction of the material on this disc/email or any part of it.
5. SafetyLink Pty Ltd can terminate this authority to reproduce this material on 7 day's notice in writing to you at your last known business address, for any reason. You must return this disc/email to SafetyLink Pty Ltd immediately after such a termination takes effect.

If you do not accept these conditions please return the disc/email to SafetyLink Pty Ltd. Your retention of the disc/email will otherwise be evidence of your acceptance of these conditions.

Patents

SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued.

Should you wish to know the progress of our intellectual property on a specific product please email us on ip@heightsafety.com.au and quote the product code.

